



POWERFUL
AND FAST



COMPLETE
RANGE



RELIABLE
AND STURDY

Automation
system for
sliding gates
up to **3500 Kg**

Dítec **CROSS**

Ditec CROSS

Ditec CROSS is the range of automation for sliding gates up to 3500 kg designed for commercial, industrial and condominium installations, guaranteeing maximum safety and reliability. The automation is available in different solutions equipped either with a brand new 230 Vac control panel or an innovative inverter technology based control unit

Ditec CROSS 18

For sliding gates up to 1800 Kg.

For intensive use.

Available with mechanical or magnetic limit switches. LCA85 control panel (included)

gear motor
in die-cast aluminium alloy

vertical levelling screws and horizontal adjustment slots
to adjust the automation system to the surface below and the gate rack



electric brake/ electronic braking

control panel
integrated in the operating device and easy to configure

key-protected handle release system
for manual opening and closing of the gate in case of blackout

Ditec CROSS 35

For sliding gates up to 3500 Kg.

For very intensive use.

Inverter and magnetic limit switches control. LCU43B control panel included

control panel
pre-installed in IP55 casing and easy to configure

vertical levelling screws
(additional adjustment spacers included in the package)

base plate
in galvanized steel (included)



self-ventilated gear motor
with steel and bronze components

inspection window
ensuring only qualified personnel access

sturdy **lever-release device**,
easy to access when inspection door is open

FULL COMPLIANCE WITH EUROPEAN DIRECTIVES AND STANDARDS

- 2014/30/EU - EMCD - Electromagnetic Compatibility Directive
- 2014/53/EU - RED - Radio Equipment Directive
- 2006/42/CE - Machines Directive - (Annex II-B; Annex II-A; Annex I-Chapter 1)
- 2011/65/EU - RoHS 2 - Restriction of hazardous substances
- 2015/863/EU - RoHS 2 Amendment - Restriction of hazardous substances



LCA85 control panel

for a perfect motion control


The advanced digital control panel **LCA85**, equipping **CROSS18EP** and **CROSS18VEP**, allows to manage perfectly the stroke of the gate in all its phases. Thanks to an innovative proprietary system of constant position control (Ditec Virtual Encoder), you can perfectly manage the position with precision and safety.

two-digit display and navigation buttons
for easy configuration and diagnostics

removable memory to save operating settings
for duplication on another control unit,
and for programming up to 200 remote controls

2 plug-in slots for control and radio **safety cards**
(self-testing safety edges, magnetic loop motion detector,
RFID decoder proximity selector)

433 or 868 MHz radio receiver module
removable and swappable

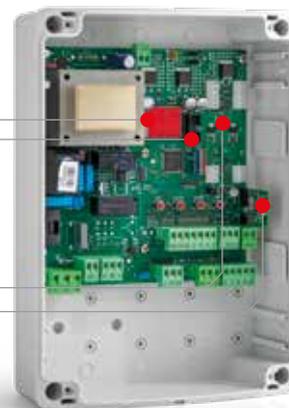

ALL YOU NEED... and more!

- **Wizard menu (Wizard WZ)**, to configure the control panel quickly and simply during initial setup: just choose the operating logic (with or without slowdown), the opening direction, select the option of automatic closing, memorize up to 200 remote controls, and you're ready to go!
- installers can adjust **more than 100 parameters**, using the easy-to-use menu, the display and the navigation buttons
- **energy saving** during standby (Green Mode)
- **integrated diagnostics** with counters and recent alarms log
- **advanced maneuver management**: increased starting torque, acceleration at start of opening and closing movements, obstacle detection, movement reversal or obstacle disengagement
- **force adjustment**

- **adjustable obstacle thrust force sensitivity** for both normal operation and for final approach during opening and closing maneuvers
- **automatic ramp adjustment**: in low temperature conditions, the control unit increases the initial torque whilst reducing the acceleration time
- **safety device test**
- **2 dedicated inputs** (for open and closed positions) for selftesting resistive active safety edges (8.2kΩ)
- **separate power outputs** for 24 Vac and 24 Vdc accessories
- **2 configurable 24 Vdc outputs** for accessories such as a courtesy light, flashing light and gate, open indicator lamp, and active output according to the status of the gate and the type of use
- **heavy traffic function**: automatically increases the automatic re-closing in case of consecutive opening requests (e.g. during peak hours in a condominium context), to reduce user waiting times and limit the overheating and wear and tear motors

TECHNICAL FEATURES

Description	LCA85
Radio frequency	433,92 MHz in standard configuration 868,35 MHz with ZENPRS or with BIXPR2
Interchangeable receiver module 433.92 MHz -> 868.35 MHz	■
Mains power supply	230 Vac - 50/60 Hz
Motor power supply	3 A
Accessory power supply 24 Vdc and 24 Vac	0.5 A max
Stroke management	virtual encoder and limit switches
Limit switch management	■
Energy saving (GREEN mode)	reduced consumption in standby*
Operating temperature	-20°C ÷ +55°C in standard conditions (-35°C ÷ +55°C with NIO system active)
Protection rating of electrical panel	IP55
Opening control	■
Partial opening control	■
Closing control	■
Stop control	■
Inching control	■
Hold-to-run control selectable from display	■
Hold-to-run control only in closing.	■
Automatic opening	■
Automatic closing contact management	■
Safety edge with 8.2kΩ resistance	■ in open and closed positions
Flashing light	230 Vac max 25 W

* Limitation of current absorbed by accessories on standby

Description	LCA85
Number of configurable 24 Vdc outputs	2
- gate open warning light (ON/OFF)	■
- gate open warning light with proportional flash mode	■
- courtesy light	■
- 24 Vdc LED flashing light	■
- status indicator light for stop, safety, maintenance alarm	■
Configuration of programmable functions	display and navigation buttons
Force adjustment	■ (electronics)
Thrust on obstructions	adjustable
Braking/deceleration	■
Approach space before the limit switches	adjustable
Automatic closing time	adjustable
High traffic management	■
Integrated datalogging (counters and recent alarm log)	viewable on display
FW update	using Amigo SW or USBPROG
Safety stop (emergency stop)	■
Closure safety (reversal)	■
Safety test function (for self-testing safety devices)	■
ODS - Obstruction Detection System (causes the gate to stop or reverses movement when an obstacle is detected)	■
NIO - Antifreeze system	■
Magnetic loop detector	■ with accessory LAB9

Inverter **LCU43** control panel

powerful and fast automation

CROSS20VEI and **CROSS35VEI** are equipped with 230 Vac 50/60 Hz inverter technology control panel in IP55 box

- the use of the inverter guarantees more power and torque to the motor in all the stroke phases
- the hardware of the gate is preserved thanks to the possibility of managing acceleration and deceleration ramps, opening and closing speed, easily configurable from the display



2 plug-in slots for control and radio safety cards
(self-testing safety edges, magnetic loop motion detector, RFID decoder proximity selector)

433 or 868 MHz radio receiver module
removable and swappable

two-digit display and navigation buttons
for easy configuration and diagnostics

removable memory to save operating settings for duplication on another control unit, and for programming up to 200 remote controls

MicroSD card for advanced diagnostics
with registration of all events

DITEC ELECTRONICS.... what else?!

- thanks to the **Ditec Virtual Encoder**, the position of the gate is constantly tracked
- high speed**: 30 cm/s for gates up to 2000 Kg and 25 cm/s for gates up to 3500 Kg, in compliance with all the current standards
- over-temperature protection** for board and motor
- energy saving** mode which limits stand-by consumption by disconnecting accessories
- 2 dedicated inputs (for open and closed positions)** for selftesting resistive active safety edges (8.2kΩ)

- Power Boost function**: if needed, the control panel automatically adjusts to provide more thrust
- dedicated terminal** for simple and fast connection of pairs of Ditec CROSS 20 or Ditec CROSS 35 operators in master/slave configuration for synchronized control of double or interlocked automation
- integrated diagnostics** with counters and recent alarms log (shown on the control panel display)
- advanced diagnostics**: events log can be stored on a MicroSD card (not included) and then analysed via Ditec Amigo software (free) for accurate trouble-shooting

Description	LCU43A - LCU43B
Radio frequency	433.92 MHz in standard configuration 868.35 MHz with ZENPRS or with BIXPR2
Interchangeable receiver module 433.92 MHz --> 868.35 MHz	■
Mains power supply	230 Vac - 50/60 Hz
Motor power supply	3.5 A (LCU43A) - 4 A (LCU43B)
Accessory power supply 24 Vdc and 24 Vac	max 0.5 A
Stroke management	virtual encoder and limit switches
Energy saving (GREEN mode)	reduced consumption in standby*
Operating temperature	-20°C ÷ +55°C in standard conditions (-35°C ÷ +55°C with NIO system active)
Protection rating of electrical panel	IP55
Opening control	■
Partial opening control	■
Closing control	■
Stop control	■
Inching control	■
Hold-to-run control selectable from display	■
Hold-to-run control only in closing.	■
Automatic opening	■
Automatic closing contact management	■
Safety edge with 8.2kΩ resistance	■ in open and closed positions
Flashing light	230 Vac max 25 W
* Limitation of current absorbed by accessories on standby	

Description	LCU43A - LCU43B
Number of configurable 24 Vdc outputs	2
- gate open warning light (ON/OFF)	■
- gate open warning light with proportional flash mode	■
- courtesy light	■
- 24 Vdc LED flashing light	■
- status indicator light for stop, safety, maintenance alarm	■
Configuration of programmable functions	display and navigation buttons
Speed	adjustable
Braking/deceleration	■
Approach space before the limit switches	adjustable
Automatic closing time	adjustable
High traffic management	■
Integrated datalogging (counters and recent alarm log)	viewable on display
Extended datalogging on Micro SD (in-depth recording of each event)	■
FW update	using MicroSD or using Amigo SW and USBPROG
Safety stop (emergency stop)	■
Closure safety (reversal)	■
Safety test function (for self-testing safety devices)	■
NIO - Antifreeze system	■
Magnetic loop detector	■ with accessory LAB9



POWERFUL AND FAST

- 230 Vac electronics guarantees maximum performances even under adverse conditions, thanks to a stronger dynamic thrust during the initial phase of operation
- the 230 Vac inverter control panel allows to manage the three-phase motor ensuring a stronger thrust along the whole stroke



COMPLETE RANGE

Four versions available:

- two 1800 Kg versions with integrated control panel, single-phase and mechanical or magnetic limit switches
- one 2000 kg version with integrated inverter control panel with magnetic limit switches
- one 3500 Kg version with inverter control panel and magnetic limit switches




RELIABLE AND STURDY long life to your installations

- steel **worm screw** for CROSS 20; cemented, tempered and adjusted screw with a bronze crown for the CROSS 30E model
- lubricating grease** suitable for temperatures ranging from -35°C to +55°C for CROSS 18 and CROSS 20 and oil bath for CROSS 35
- irreversible gear motor** to avoid the need for electro-mechanical locks
- electric brake and electronic clutch** to guarantee irreversibility and precise stopping points for CROSS 18 and CROSS 20


Example of installation

Discover the entire range of Ditec branded products at www.ditecautomations.com

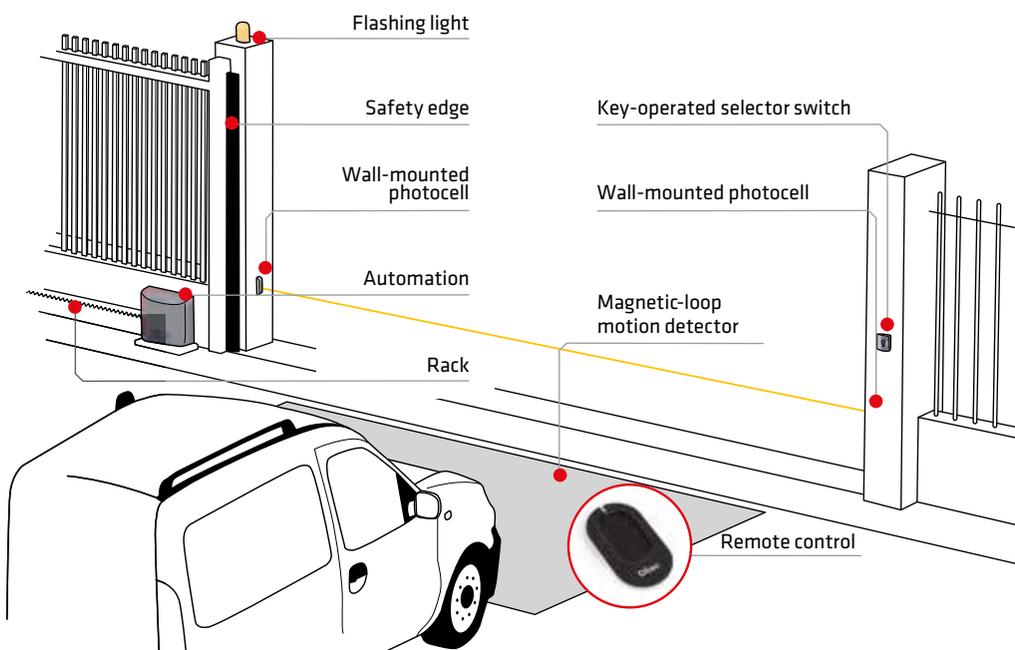



Ditec Cross 18 - Ditec Cross 20

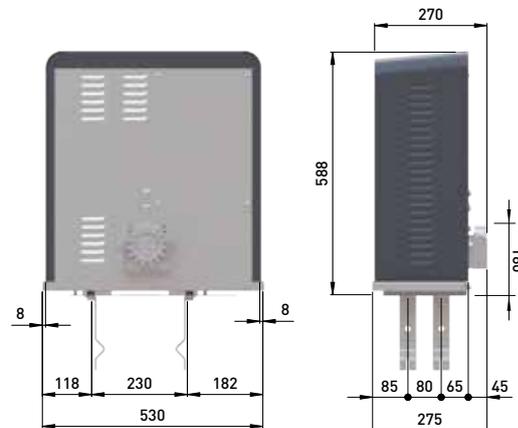

Ditec Cross 35

TECHNICAL SPECIFICATIONS

DESCRIZIONE	CROSS 18EP	CROSS 18VEP	CROSS 20VEI	CROSS 35VEI
Electromechanical actuator	for sliding gates up to 1800 kg	for sliding gates up to 1800 kg	for sliding gates up to 2000 kg	for sliding gates up to 3500 kg
Stroke control	lever-operated mechanical stop	magnetic limit switch	magnetic limit switch	magnetic limit switch
Capacity	1800 kg	1800 kg	2000 kg	3500 kg
Service index	intensive up to 350,000 cycles	intensive up to 350,000 cycles	very intensive up to 450,000 cycles	intensive up to 1,000,000 cycles
Intermittent operation	S2 = 20 min S3 = 20%	S2 = 20 min S3 = 20%	S2 = 30 min S3 = 30%	S2 = 60 min S3 = 50%
Cycles / days *	300 cycles per day, one maneuver every 5 min.	300 cycles per day, one maneuver every 5 min.	480 cycles per day, one maneuver every 3 min.	720 cycles per day, one maneuver every 2 min.
Consecutive cycles *	20 consecutive cycles, one maneuver per min.	20 consecutive cycles, one maneuver per min.	30 consecutive cycles, one maneuver per min.	60 consecutive cycles, one maneuver per min.
Power absorption	230 Vac - 50/60 Hz			
Power input	3 A	3 A	3.5 A	4 A
Thrust	1800 N	1800 N	2000 N	3000 N
Opening speed	0.2 m/s	0.2 m/s	0.1 - 0.3 m/s	0.1 - 0.25 m/s
Closing speed	0.2 m/s	0.2 m/s	0.1 - 0.3 m/s	0.1 - 0.25 m/s
Max stroke **	36 m	36 m	60 m	60 m
Release system for manual opening	key operated	key operated	key operated	lever
Operating temperature	-20°C ÷ +55°C (-35°C ÷ +55°C with NIO enabled)	-20°C ÷ +55°C (-35°C ÷ +55°C with NIO enabled)	-20°C ÷ +55°C (-35°C ÷ +55°C with NIO enabled)	-20°C ÷ +55°C (-35°C ÷ +55°C with NIO enabled)
Protection level	IP X4	IP X4	IP X4	IP 45
Product dimensions (mm)	440x205x375	440x205x375	440x205x375	530x275x588
Control panel	LCA85	LCA85	LCU43A	LCU43B

* Cycles are estimated considering a gate with a length of 6 m and a default speed of 20 cm/s. CROSS20VEI allows a speed of 30 cm/s. In this case, it is possible to obtain 640 cycles/day and 45 consecutive cycles at 25°C. Each cycle is considered an opening maneuver followed by a closing maneuver.
** The maximum stroke of the gate has been calculated considering a default speed of 20 cm/s.

SPECIFIC ACCESSORIES



▶ 24 Vdc / 24 Vac photocells

- ▶ aesthetically integrated with others control devices
- ▶ compact size with -90°/+90° orientable card
- ▶ IP55 industrial level protection rating
- ▶ also available in battery-powered version



▶ Racks

- ▶ for CROSS 18 and 20, in galvanized steel, module 4, complete with supports and screw, 30x12x1000 mm
- ▶ for CROSS 35, in galvanized steel, module 6, 30x30x1000 mm



▶ Command devices

- ▶ Key-operated selector switch wall mounted or semi-recessed, with or without European cylinder
- ▶ four-channel digital radio keypads
- ▶ proximity selector with transponder



▶ Active radio safety edges

868 MHz radio transmission system of safety signals for active safety edges



▶ Magnetic-loop inductive detector

plug-in for entrance control



Cert. n. 0957/6

Ditec S.p.A.
Largo U. Boccioni, 1
21040 Origgio (VA) • Italy

Part of ASSA ABLÖY

Tel +39 02 963911
Fax +39 02 9650314

info@ditecautomations.com
www.ditecautomations.com

COD. N237B - 11/2021
Ditec CROSS